




- (51) International Patent Classification:  
**B60R 21/203** (2006.01)
- (21) International Application Number:  
PCT/JP2014/003694
- (22) International Filing Date:  
11 July 2014 (11.07.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant: **CALSONIC KANSEI CORPORATION**  
[JP/JP]; 2-1917, Nisshin-cho, Kita-ku, Saitama-shi, Saitama, 3318501 (JP).
- (72) Inventors: **SWAMINATHAN, Prabhu**; 319G, Ramanujam Nagar South, 3rd Cross Street, Karur, Tamil Nadu, 639002 (IN). **KARUPPIAH, Kamalakannan**; c/o Larsen & Toubro Infotech Ltd., Landmark Tower 37F, 2-2-1, Minatomirai, Nishi-Ku, Yokohama-shi, Kanagawa, 2208137 (JP).
- (74) Agents: **MIYOSHI, Hidekazu** et al.; Toranomom Kotohira Tower, 2-8, Toranomom 1-chome, Minato-ku, Tokyo, 1050001 (JP).

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: VEHICLE WARNING SYSTEM

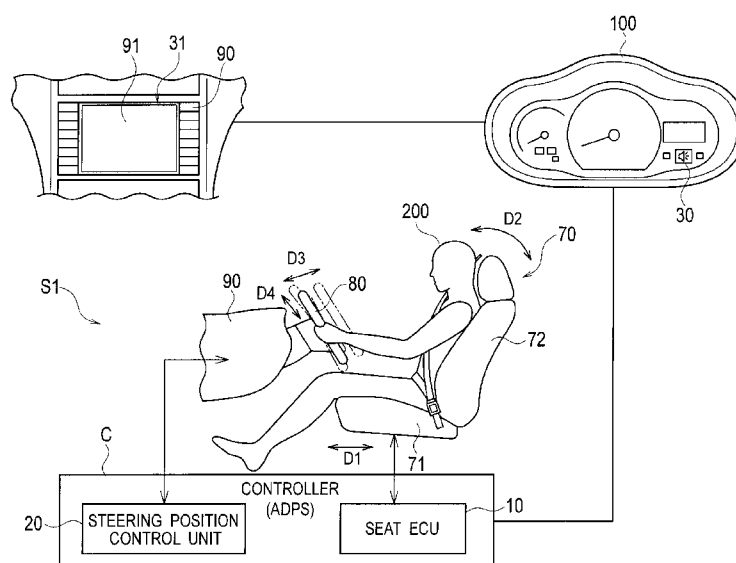

(57) Abstract: Calculation unit (50) calculates first arrangement of appropriate positions, for an airbag deployment event, set up by adjusting seat cushion (71) and seatback (72) of seat (70), on the basis of information on body size of the driver acquired by body size information acquisition unit (60), and compares the first arrangement with a second arrangement of current positions including at least a position of the seat cushion (71), an angle of the seatback (72), and a position of the steering wheel (80). Alarm unit (14) provides the driver with a warning for calling attention if a difference between the first arrangement calculated by the calculation unit (60) and the second arrangement is equal to or greater than a predetermined acceptable level.

WO 2016/006019 A1